



INDUSTRIES SERVED



CHOCOLATE & CANDY



MEAT & POULTRY



DRESSINGS, RELISHES & DIPS



SOUPS & SAUCES



CHEESE & DAIRY



PET FOOD



SAVOURY & PIE FILLINGS



READY MEALS

The HT2 is a low level tipper designed to tip standard 400 and 600lb Euro buggys onto tables, conveyors or into any other bulk product containers. The HT2 can also be adapted to fit a variety of other containers such as 55 gallon drums, mixing bowls or any other bulk product containers.

It is a simple, versatile easy to maintain machine which increases production and reduces the risk of repetitive work injuries like strained muscles, ligaments and other musculoskeletal disorders.

FEATURES

304
 STAINLESS STEEL

770lb
 MAX CAPACITY

53"
 TIPPING HEIGHT

DUAL CONTROLS


IP65
 WATERPROOF

12V
 MAINS OR BATTERY

S. STEEL CYLINDER

UP TO 125°
 TIPPING ANGLE



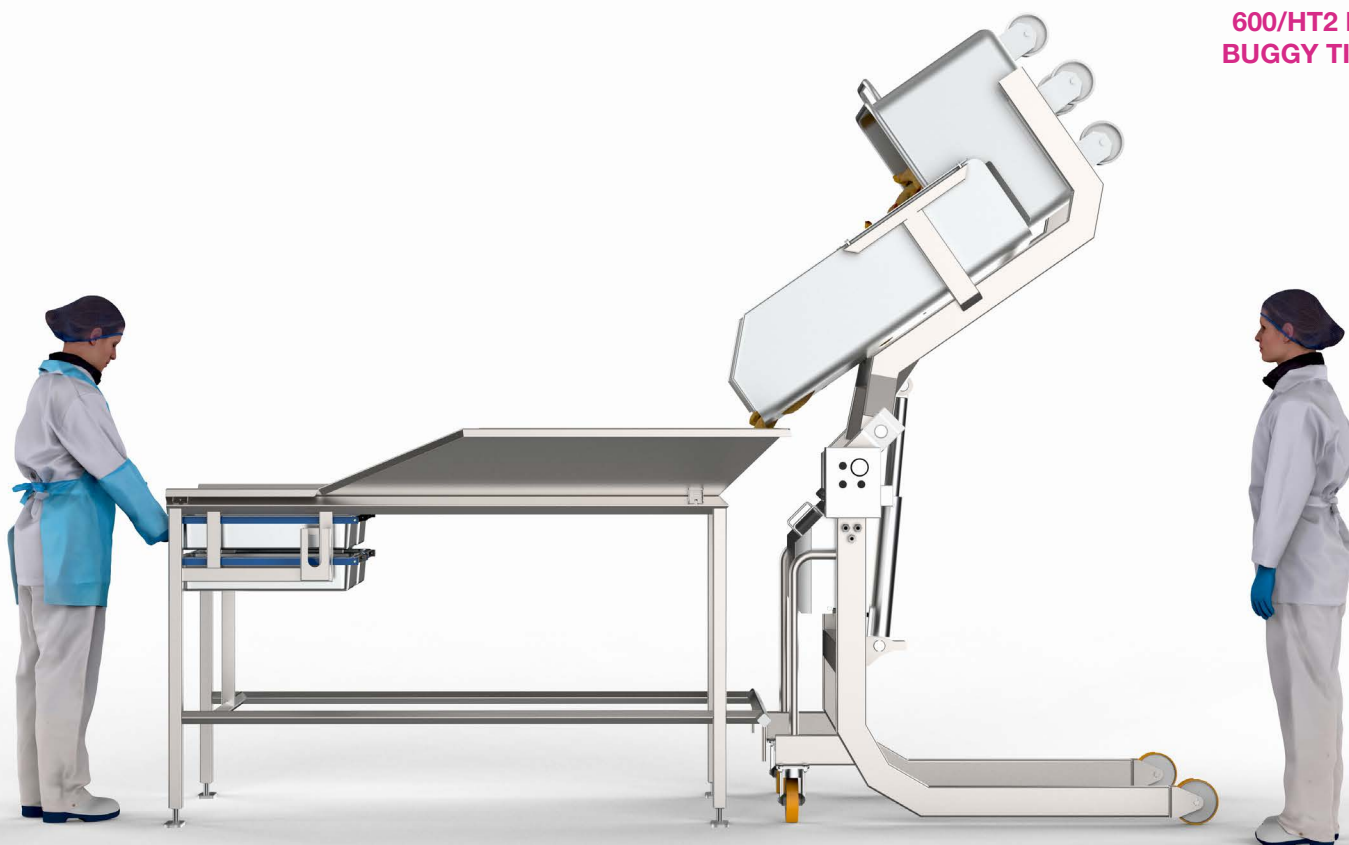

STREAMLINED OPERATIONAL DESIGN

HT2 is a simple easy to maintain machine offering increased productivity helping prevent workplace injuries from reparative strain.

The machine is controlled by independent push operated controls allowing the operator to incrementally adjust the tipping angle to aid in the control of product flow. Dual controls on either side of the tipper allows operation of the machine from both sides and gives a complete view of the machine in operation.

HT2 is designed to lift a 400 or 600lb Euro buggys, moving it around the production area for safe and easy unloading. The cradle has a foot assisted latch which locking the buggy in place. Euro buggys are tipped at a maximum height of 53" and at a maximum tip angle of 125°, with a maximum weight capacity of 770lbs. Its smooth tipping action allows for efficient unloading of product.

Manufactured from 304 grade stainless steel and rated to IP65 and are suitable for direct contact with food products.



sales@cmpsol.com

t. 951 808 4376 f. 951 808 8657

[View this
product online](#)

BATTERY OR MAINS OPERATED

As with all our range of tippers and tilters the HT2 can be supplied battery operated or mains powered .

The battery operation is supplied with a 110V mains charger allowing the machine to be simply plugged in at the end of the shift and recharged for the next working day.

OPERATIONAL SAFETY

All of our machines are designed with operator safety in mind. There are no trap or knit points where an operator can trap a finger. The unit is mounted on heavy duty mobile lockable castors and the machine is lowered by means of a stainless-steel hydraulic displacement cylinder using gravity.

CUSTOMIZED SOLUTIONS

Our range of tippers and tilters can be completely customized to your specific individual needs, all of our machines can be integrated with a range of feed and transfer tables or specific styles of chutes. For more information regarding your needs please don't hesitate to contact us at CM Process Solutions.

The HT2 is adaptable to fit a range of containers.

