



INDUSTRIES SERVED



CHOCOLATE & CANDY



MEAT & POULTRY



DRESSINGS, RELISHES & DIPS



SOUPS & SAUCES



CHEESE & DAIRY



PET FOOD



SAVOURY & PIE FILLINGS



READY MEALS

The SRV 300 from CM Process Solutions is a semi-automatic compact boot washing machine which washes both the soles and sides of employee's rubber boots.

The machines small footprint makes it an excellent boot wash for small processing plants.

FEATURES

304
 STAINLESS
 STEEL

BOOT SCRUB


SOLE SCRUB

**CHEMICAL
 AUTO DOSING**

**MAINS
 OPERATED**

**HYGIENIC
 BY DESIGN**



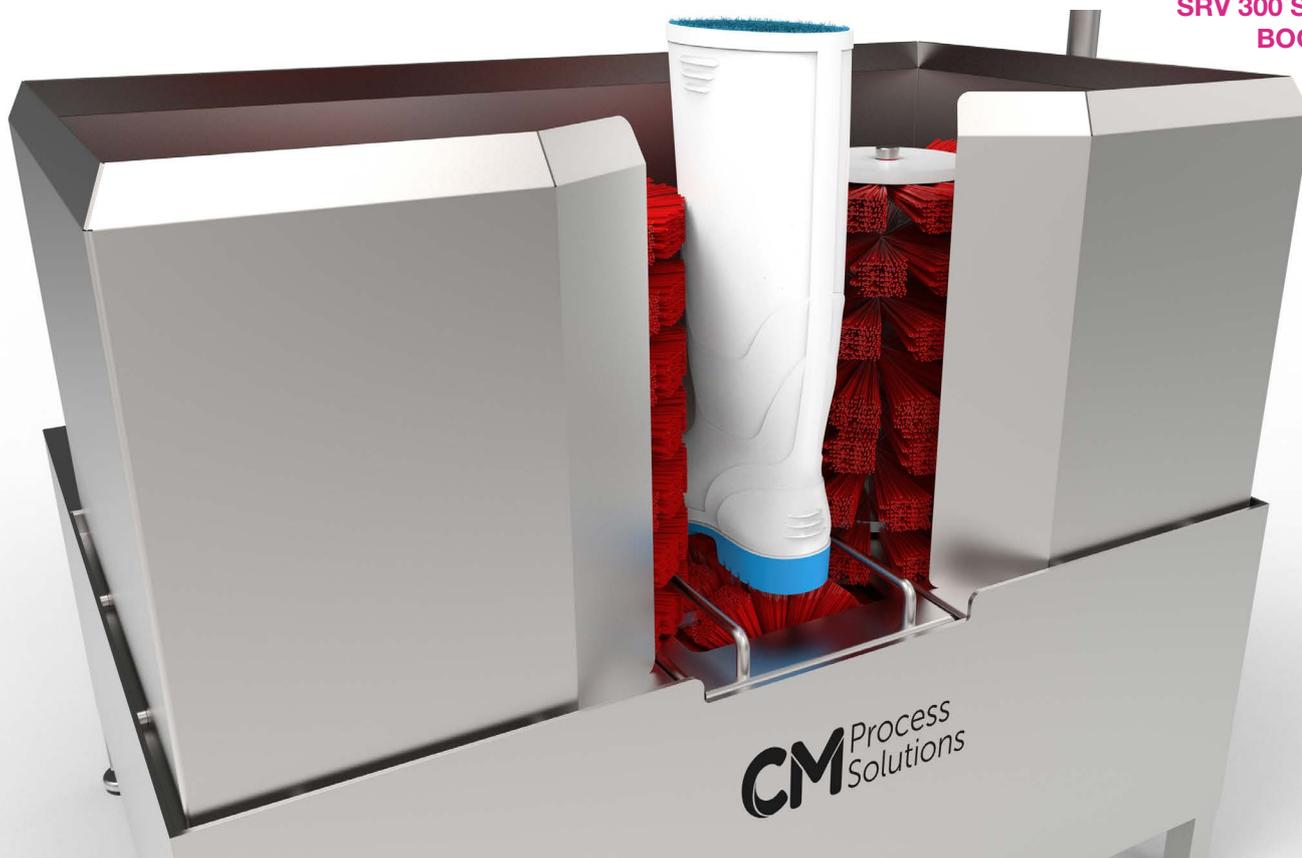

OPERATIONAL DESIGN

The SRV 300 is semi-automatic with a stainless steel button mounted within the handrail on the machine. The operator simply places their boot between the two vertically mounted brushes presses the button initiating the rotation of the three brushes. A brush is mounted horizontally for cleaning the soles of the boot, the other two are vertically mounted facilitating the cleaning of the sides of the boot.

Water and sanitizer chemical are sprayed onto the brushes from the spray bar mounted by the brushes. Chemical is adjusted by a needle valve mounted on the incoming side of the water supply pipework. Each brush is individually controlled by its own motor.

YOUR CHOICE

Unlike some of our competitors CM Process Solutions warranty does not obligate you to buy chemicals from us in order to receive spare parts or support.

We understand that each application is unique, and we fully believe that there is no one who understands your needs better than you, the customer and your current chemical supplier.



sales@cmpsol.com

t. 951 808 4376 f. 951 808 8657

[View this product online](#)

SAFETY FEATURES

Our range of boot and sole washers are designed with safety in mind.

The steps are non-slip stainless steel. A handrail is positioned to one side of the machine for the operator to steady themselves while placing their boot within the sole washer machine.



SANITARY DESIGN

As with all our equipment our range of sole washers are built using hygienic principles.

The brushes are easily removed without the use of tools by simply lifting the stainless steel cover and sliding it off the motor cam. Manufactured in 304 grade stainless steel, surfaces are radiused allowing water to drain easily.

MACHINE SERVICE DETAILS

ELECTRIC	480v 60 HZ 3 phase 4 wire supply 24 v AC control circuit.
WATER	1 x ¾" NPT Inlet. 43 -65 psi inlet pressure (warm if available).
DRAIN	1 X 2". Outlet Gravity only.

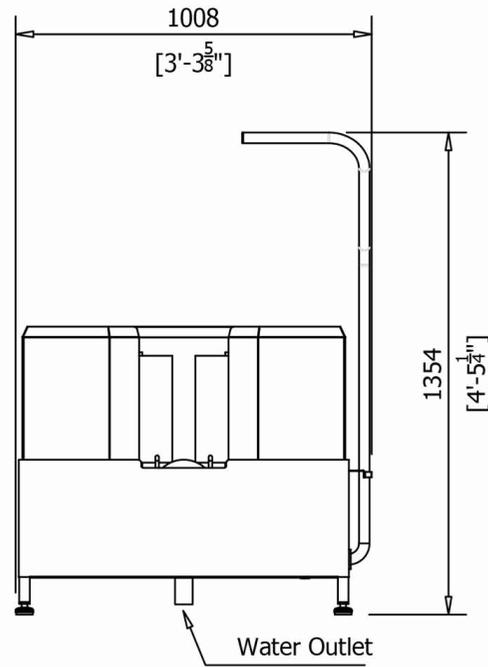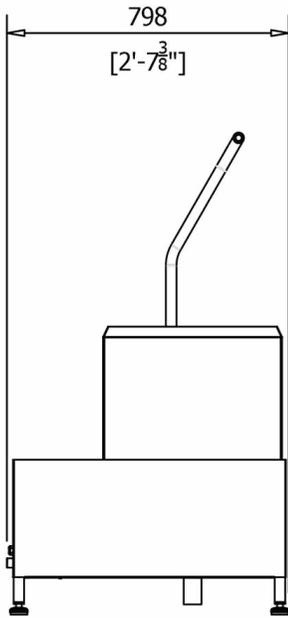

El.Connection 480V, 3~, 60Hz , Power 0.94 HP

